




CUSTOMIZED YOUR NEEDS WE DESIGN MULTIPLE/SINGLE
ROBUST SMART SAFETY MEASURES ALL TYPES DUST

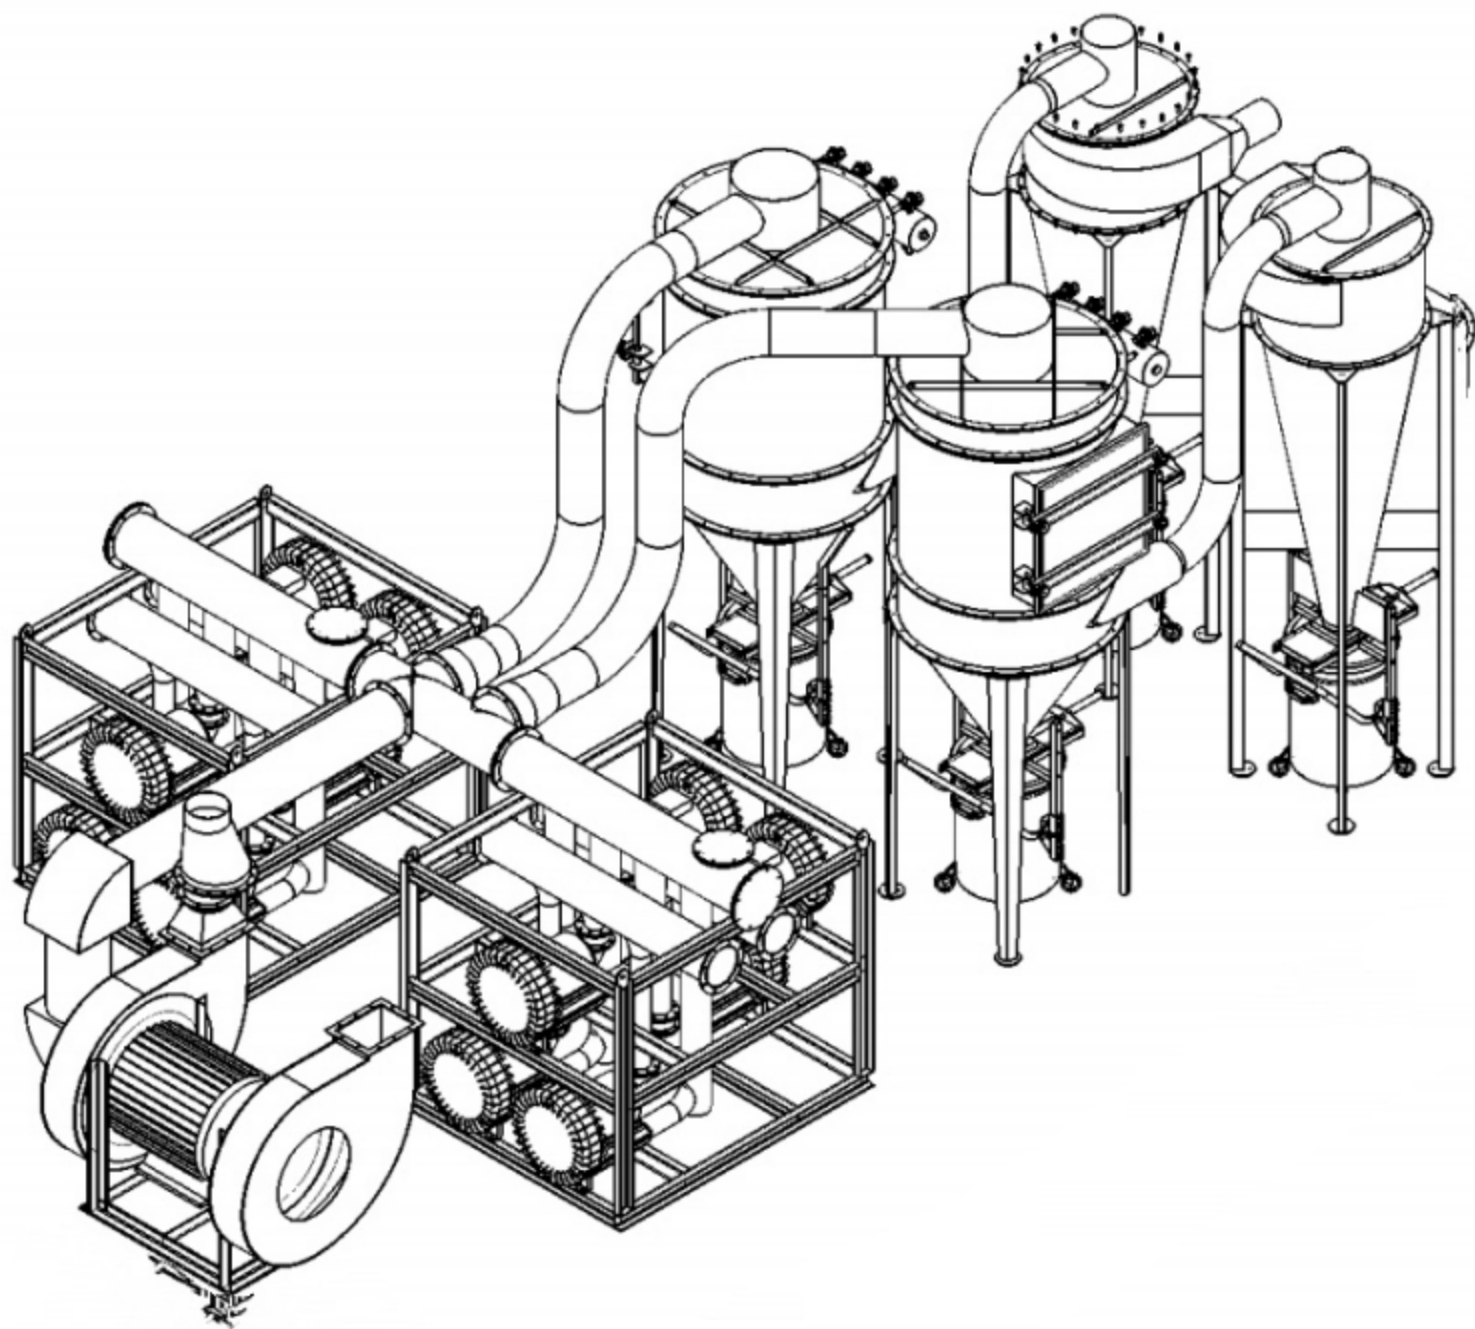

KEVO VACUUM MODULES

INDUSTRIAL VACUUM SYSTEMS




**KEVO INDUSTRIAL
SYSTEMS
MODULAR DESIGN**

**CUSTOMIZED YOUR NEEDS WE DESIGN MULTIPLE/SINGLE
ROBUST SMART SAFETY MEASURES ALL TYPES DUST**



LINDEN BUCKS SDN BHD
CENTRAL VACUUM SPECIALIST
cvs@lindenbucks.com

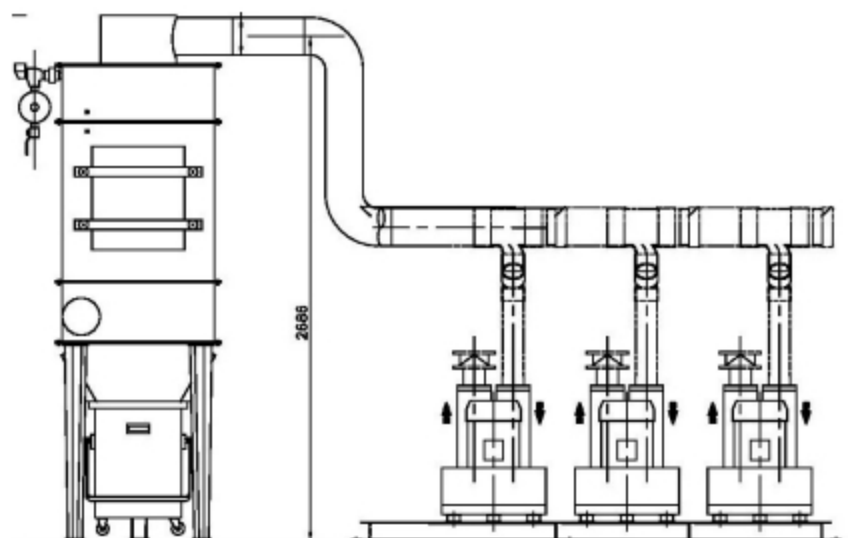


EL-BVAC series

Standard Models for general requirements

Model		EL-3	EL-6	EL-8	EL-10	EL-EC0
No. of users*	Qty	3 users	6 users	8 users	10 users	4 users
Design Type	Type	modular	modular	modular	modular	modular
FILTER SEPARATOR	Model	FS1	FS2	FS3	FS4	FS2
Primary Filtration	Type	CYCLONIC BUFFER PLATE 3mm				
Secondary Filter	Type	Cartridge Type Filters (Polyester) auto purging, easy replacement				
	Area	1 x 3m ²	3 x 2m ²	3 x 3m ²	4 x 3m ²	3 x 2m ²
Easy Bin Release	LT	100LT	100LT	100LT	100LT	100LT
VACUUM UNIT		380-415V/3PHASE/50Hz (others available upon request)				
		2 x 5.5kW	1 x 7.5kW 1 x 12.5kW	2 x 7.5kW 1 x 12.5kW	1 x 7.5kW 2 x 12.5kW	1 x 12.5kW
CONTROL PANEL		Auto start/stop	Filter purging	Emergency stop	Pressure Detection	PLC
Dimension (mm)	L x W	850 x 2350	850 x 2350	950 x 2950	950 x 3050	850 x 1850
	H	1990	1990	2500	2500	1990
Max Vacuum	mbar	290	330	340	340	330
Max Airflow	CMH	1070	1600	2160	3240	1040
Weight	kg	480	700	930	1080	610

* Based on standard cleaning requirements of 22m/s – 120CMH @ 200mbar
Other technical details – individual data sheets available

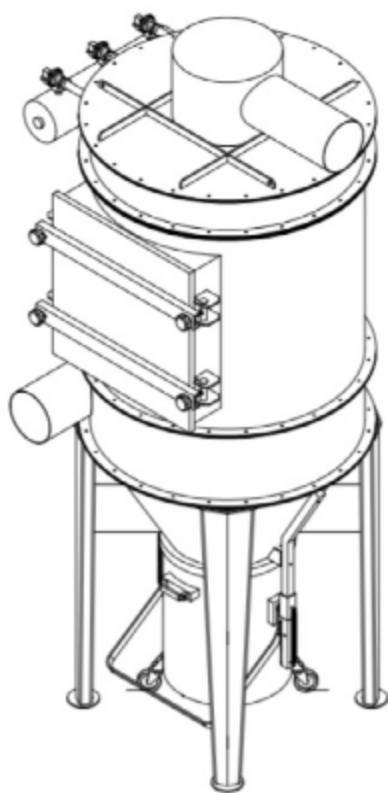


SP Series

	Filter		Dimensions (mm)			Bin
	Area m2	No.	D	Height	Inlet/Outlet	LT
SP1	3	1	600	2000	113	100
SP2	6	2	600	2000	113	100
SP3	9	3	800	2500	166	100
SP4	12	4	800	2500	166	100
SP5	16	4	950	3000	200	175
SP6	20	5	950	3000	250	175
SP7	25	5	950	3000	250	175
SP8	42	3	1200	3500	250	175
SP9	56	4	1200	3500	300	175
SP10	70	5	1500	3800	350	175
SP11	98	7	1700	4050	400	175
SP12	140	10	2100	4415	450	175
SP13	182	13	2100	4415	450	175

MILDSTEEL3t. FILTERACCESS EASYBINDROP
STRAIGHT/FLANGE FILTERPURGING RUGGEDDESIGN



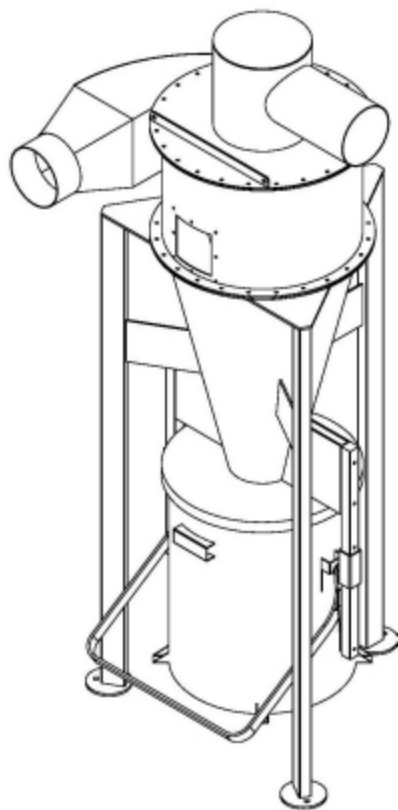

SPIN CYCLONE SERIES

Model	D.	Height	Inlet/ Outlet	Bin
SPIN600	600	2500	200	100LT
SPIN800	800	2780	300	100LT
SPIN900	900	3820	250	175LT
SPIN1200	1200	5025	400	175LT

MILDSTEEL3t. NORMAL/HIGH EFFICIENCY EASYBINDROP
STRAIGHT/FLANGE 50-130mmWGDrop RUGGEDDESIGN

